

"THE AUGER IS THE ANSWER" MODEL SC1040/30 HIGH DENSITY SELF-CONTAINED COMPACTOR



<u>SANI-TECH AUGERS</u> <u>DO IT ALL</u>

SANI-TECH augers pre-crush and compact in one powerful motion. While processing material, augers continuously runs in a forward direction, crushing and reducing the size of what they're fed. This enables them to compact up to five times faster than conventional hydraulic compactors.

Sani-Tech SC1040/30 10HP Self-Contained compactors are ideal for wet, hazardous or messy waste and where cleanliness and sanitation are the highest priority. They outperform the competition because they:

- Are 100% sealed to prevent liquid and trash spillage during daily operation and emptying.
- Are designed and engineered for high performance and dependable service.
- Use 40" to 30" tapered augers designed to pre-crush large and bulky trash.
- Allow operators to simply throw material into the hopper, start the compactor and walk away. No wait time, no human intervention.

- Utilize all electric drive systems that run clean and quiet.
- Obtain compaction ratios that are two to three times greater than standard hydraulic compactors to better maximize savings.
- Have inherently small footprints so they can be installed in tight spaces.
- Have a wide variety of optional features to choose from.

COST SAVINGS IS THE BOTTOM LINE


Substantial reductions in operating costs are obtained by: increased compaction, reduced hauls and labor savings.

SANI-TECH SYSTEMS • PO BOX 444 • DUVALL, WA 98019 • (425) 788-6444 • FAX (425) 844-8625

SELF-CONTAINED COMPACTOR MODEL SC1040/30

SPECIFICATIONS		DIMENSIONS		
Hopper Capacity: Bi-fold Door Size:	4.5 Cubic Yards 36"W X 30"H	Model/ Cu. Yd.	Overall Length	Tare Weight
Auger Diameter:	Tapered 40" to 30"	SC1040/30-15	15' - 0"	6,600 lbs.
Auger RPM:	8	SC1040/30-20	18' - 0"	7,200 lbs.
Motor:	10 HP	SC1040/30-25	21' - 0"	7,900 lbs.
Displacement Rate: Electrical:	270 cu. yds./hr. 240v/480v - 3 phase	SC1040/30-30*	24' - 0"	8,400 lbs.
Amperage:	30a / 15a	SC1040/30-35*	26' - 0"	9,000 lbs.
Drive: Control Panel: Compactor Weight: Auger Torque:	Electro-mechanical UL listed 110 volt 4100# 204,000 In. Lbs. For special orders consult factory. * Request prior confirmation with refuse hauler regarding length of t			

Specifications are subject to change without notice to accommodate design improvements.

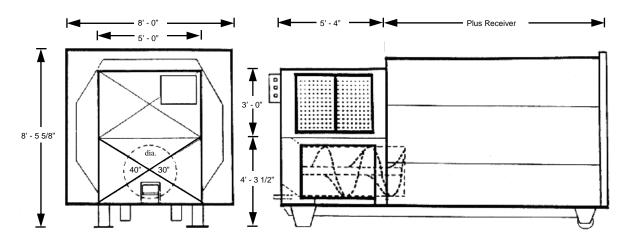

STANDARD FEATURES

- Abrasion Resistant Alloy Steel Auger
- Replaceable Cast Auger End Wear Plate
- Adjustable Running Time
- Bin Near Full Indicator
- "Almond" Machinery Enamel Finish
- Liquid Tight Auger Chamber
- Adjustable Compaction Density
- Safety Interlock System
- Keylock Start/Reverse Switch
- Mushroom Stop Switch
- High Performance Roller Bearing System

OPTIONAL FEATURES

- Odor / Insect Control
- ♦ Cart Dumper
- Custom Paint Colors
- Exhaust Fans
- Fire Suppression Systems
- Custom Hood Designs
- Liquid Drain System
- Bin Gone Sensor
- Photo Eye Automatic Start
- Automatic Electric Lubrication System

Consult factory for any custom design work.

3hp to 40hp models available for additional applications.



PO Box 444, Duvall, WA 98019 (425) 788-6444, Fax: (425) 844-8625 **E-mail:** compactorinfo@sanitech.net **WWW:** www.sanitech.net

DEALER: