

"THE AUGER IS THE ANSWER"



<u>SANI-TECH AUGER</u> <u>COMPACTORS DO IT ALL</u>

Auger-Type compactors **pre-crush** and compact in one powerful motion. While processing material, augers run **continuously** in a forward direction, crushing and reducing the size of virtually everything they're fed. This allows them to compact material **faster** and achieve **higher compaction ratios** than any other compaction system on the market today.

MODEL ST1046/36

10 HP HIGH DENSITY CORRUGATE & WASTE COMPACTOR

Sani-Tech Model ST1046/36 10HP Auger Compactors are designed to dramatically increase net payloads while reducing labor expenses, mess and floor space.

The All-Electric Drive system and Heavy Duty Construction ensure that the Sani-Tech Auger Compactor is reliable, clean and efficient.

AUGER BENEFITS

HIGH DENSITY COMPACTION = FEWER HAULS! SMALL OPENING = VIRTUALLY NO MESS! ELECTRIC DRIVE SYSTEM = NO HYDRAULICS! LOW MAINTENANCE = LESS DOWN TIME!



REDUCED LABOR, MAINTENANCE & HAULING means substantial reductions in operating costs.


COST SAVINGS IS THE BOTTOM LINE

SANI-TECH SYSTEMS • PO BOX 444 • DUVALL, WA 98019 • (425) 788-6444 • FAX (425) 844-8625

STATIONARY COMPACTOR MODEL ST1046/36

SPECIFICATIONS			<u>RECEIVER BINS</u>						
Motor:	tor: 10 HP				Rece	eiver Body		Overall	
Auger Diameter:	Tapered 46" to 36"		Roll-Off:	<u>l</u>	<u>ength</u>	Tare W	<u>gt</u> .	<u>Length</u>	
Auger Speed:	8 RPM		10 Cubic Yard CO	CS	9' 10"	3,500 l	bs.	15' 9"	
Displacement Rate:	270 Cu. Yds./Hr.		15 Cubic Yard		9' 10"	4,100 l	bs.	15' 9"	
Cycle Time:	Fully Adjustable		20 Cubic Yard		12' 10"	5,000 l	bs.	18' 9"	
Electrical:	240V / 480V - 3 Phase		25 Cubic Yard		15' 10"	8,500 l	bs.	21' 9"	
Amperage:	30 Amp / 15 Amp		30 Cubic Yard		18' 10"	6,600 l	bs.	24' 9"	
Drive:	Electro-Mechanical		35 Cubic Yard*	2	20' 10"	7,100 l	bs.	26' 9"	
Auger Torque:	204,000 In. Lbs.		40 Cubic Yard*	2	22' 10"	7,700 l	bs.	28' 9"	
Control Panel:	UL Listed		47 Cubic Yard*	_	22' 8"	7,800 l		28' 7"	
- Keylock Start/Reverse & Emergency Stop			*Request prior confirmation with refuse hauler for length of this unit. ** Consult Factory for Additional Bin Sizes						
Compactor Weight: Auger Penetration: Clear Top Opening:	4100 Lbs. 9 to 15 inches into bin 60" x 57.5"		Front Load: 2 Cubic Yard 3 Cubic Yard	Leng 6' 8 6' 8	,,	<u>Width</u> 3' 6" 3' 6"	1,	are Wgt. 140 lbs. 260 lbs.	
	5.4 Cubic Yards 42" W X 36" H fications for HOP-02 Additional Hopper Options		4 Cubic Yard 4 Cubic Yard 5 Cubic Yard 6 Cubic Yard	6' 8 6' 4 6' 4 6' 4	"	3' 6" 6' 8" 6' 8" 6' 8"	1, 1, 1,	320 lbs. 320 lbs. 380 lbs. 450 lbs.	

Note: Specifications are subject to change without notice to accommodate design improvements.




*See Bin Brochure for Additional Receiver Information

Standard Features:

- Abrasion Resistant Alloy Steel Auger
- Replaceable Cast Auger End Wear Plate
- High Performance Roller Bearings
- Full Gasket on Auger Nozzle
- Adjustable Compaction Density
- Bin Full Indicator
- High Quality Machinery Enamel Finish
- Liquid Tight Auger Chamber
- Safety Interlock System
- Meets ANSI & OSHA Standards



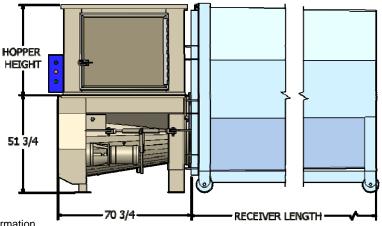

Optional Features:

- Electric Greaser System
 *Recommended for ALL Systems
- Single Phase Power
- Odor Control Systems
- Electric Cart Dumper
- Custom Paint Colors
- Liquid Drain System
- Photo Eye Automatic Start
- Remote Pendant Control Station

- Bin Gone Sensor
- Bin Near Full Sensor
- Thru-the Wall Chute
- Dock Door Enclosure
- Custom Hood Designs
- Compaction Bins
- Bin Hole Diaphragm
- Fire Ports on Bin
- Custom Engineering

*Consult factory for custom design work.

Sani-Tech Systems Inc. PO Box 444, Duvall, WA 98019 (425) 788-6444, Fax: (425) 844-8625 **E-mail:** compactorinfo@sanitech.net **Web:** www.sanitech.net